


LED Power Supply/Driver

H100W-PPS5

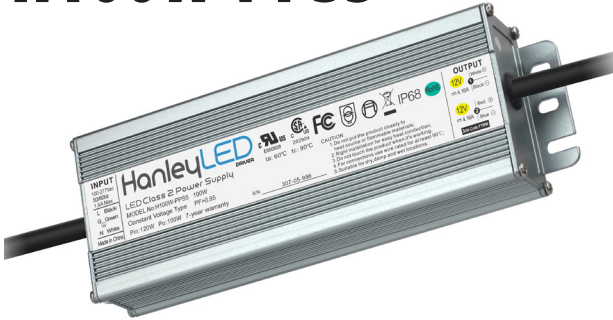

Features

- IP68 - WATERPROOF - for use indoor or outdoor, dry, damp, or wet locations
- Variable input voltage with grounding wire: 100v - 277v
- Working temperature: -40°C ~ +55°C
- OVP, OCP, SCP, OTP protection function
- Rating: Class 2, for use with LEDs and LED signage
- UL, CE, FCC, RoHS, fire rating
- Tested and approved at 100% power load
- UL Retrofit Kit Classified

Warranty

Product
7 years

Labor

5 years labor if paired with HanleyLEDs
1 year labor with any other qualified LEDs

Safety

Certification



Product Parameters

Output Characteristics

Rated Output Voltage	12V
Rated Output Current	7.8A
Rated Output Power	100W
Output Voltage Accuracy	±2.5% (11.7-12.3V)
Output ripple & noise	≤150mV

Input Characteristics

Input Voltage Range	100 ~ 277Vac
Input Frequency Range	50HZ ~ 60HZ
Input Current	1.15A/115Vac .55A/277Vac
Inrush Current (cold start)	≤ 70A (100-240Vac)
Efficiency	≥ 89%
PF	≥ 0.95
Input Power	1.6A Max

Protective Characteristics

- Over-Current Protection
- Short-Circuit Protection
- Over-Voltage Protection
- Over-Temperature Protection

Environmental Characteristics

Working Temperature	-40° ~ +50°C
Working Humidity	20 ~ 95% RH (non-condensing)
Storage Temperature	-40° ~ +85°C
Storage Humidity	10 ~ 95% RH
IP Rating	IP68
Vibration	10 ~ 500HZ, 5G 30 minutes (for X, Y, Z each axis)


Safety and EMC

Safety Rating	IP68, Class 2
Dielectric Strength (Hi-Pot)	I/P-O/P 3.75KVac/10mA/3S
	I/P-Case 1.8KVac/10mA/3S
Insulation Resistance	100MΩhm Max/500Vdc/3S
Grounding Resistance	100mΩhm
EMC	FCC part 15classB EN55015

Other Characteristics

MTBF	>50,000Khrs. MIL-HDBK-217F (25°C)
Size	195*67.5*35mm (L*W*H)
Weight	.9KG

Profile Drawings

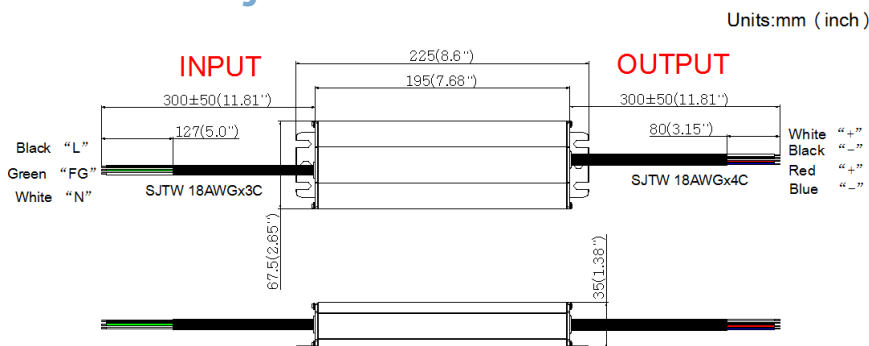

- Ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.

- Ensure the power supply position has sufficient airflow. Operating temperature must be between -40°C to +60°C.

- Do not overload the power supply with multiple appliances.

- Power supply operates at high temperature. To avoid injury, do not touch while in use.

- Do not install with power connected or during an electrical disturbance.

- Do not attempt to install by yourself. Please contact the supplier with any questions.

- Please read and follow the instructions carefully before installing. Ensure all contact points are in good working order.

- Please pay attention to the environment, and check for any unsafe conditions.